



22834

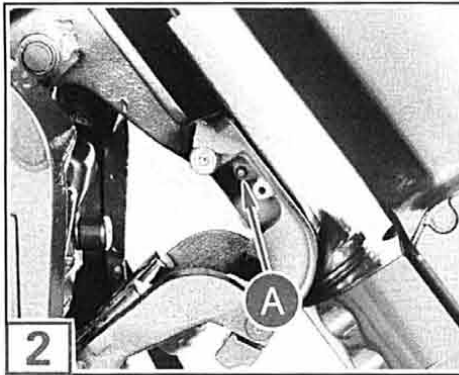

22826

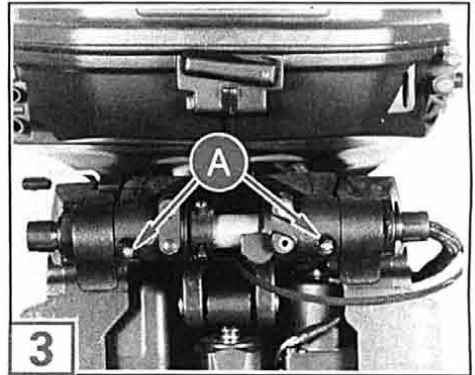


23300

Lubrication Chart

Figure	Component	Lubricant	Frequency (Days of Operation)	
			Fresh Water	Salt Water+
1	Power trim/tilt reservoir: 21 fl. oz. (622 ml)	B	As required	As required
2	Swivel bracket	A	60 Days	30 Days
3	Tilt tube bushings	A	60 Days	30 Days

PCE0024

+ Some areas may require more frequent lubrication.

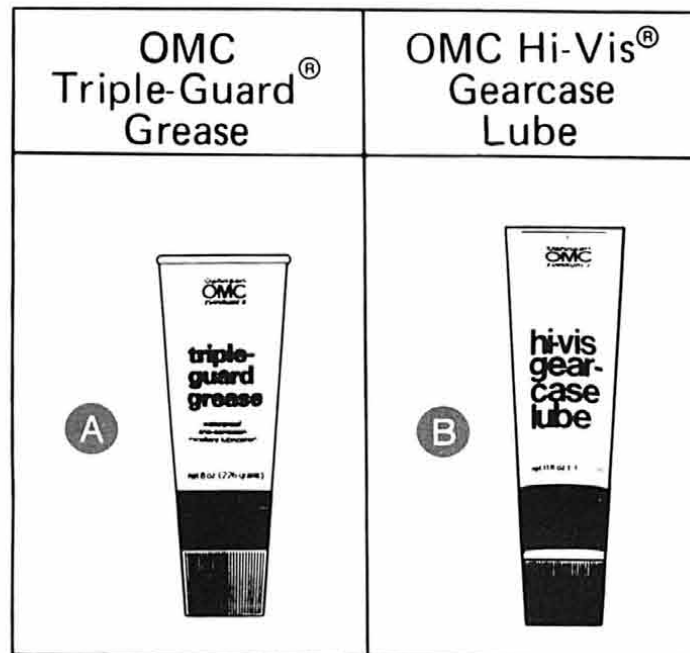

DR3495

* GM Dexron II automatic transmission fluid is an acceptable substitute.