



22834

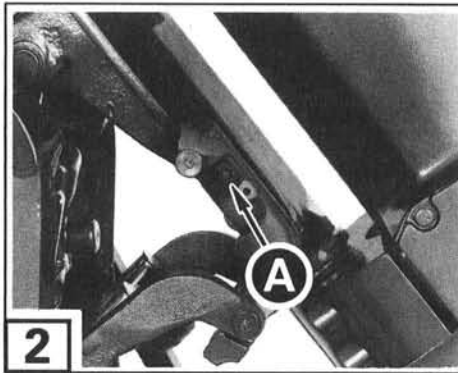

22826

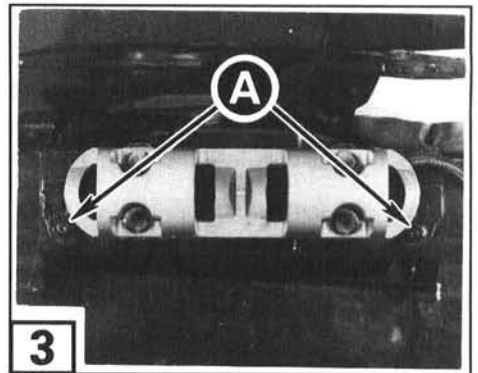

30231

Lubrication Chart

Figure	Component	Lubricant	Frequency (Days of Operation)	
			Fresh Water	Salt Water†
1	Power trim/tilt reservoir: 21 fl. oz. (622 ml)	B	As required	As required
2	Swivel bracket	A	60 Days	30 Days
3	Tilt tube bushings	A	60 Days	30 Days

† Some areas may require more frequent lubrication.

PCE0024

<p>OMC <i>Triple-Guard®</i> Grease</p>	<p>OMC Power <i>Trim/Tilt and Power</i> <i>Steering Fluid *</i></p>
A	B

* GM Dexron II automatic transmission fluid is an acceptable substitute.